



1948

'Our Quality Is Our Standart.'

CONTENTS

01

INTRODUCTION

AKDAŞ Silah Corp.

Selim Akdaş

Our Products

02

PISTOLS

SEMI AUTOMATIC

SA-9

SEM-55

SUB-MACHINE

SSA-9

SEMX-55

03

GRENADE LAUNCHERS

AK-40GLX

AK-40GLJ

AK-40MGL

04

ANTI RIOT LAUNCHERS

AK-40RGL
AK-37RGL
AK-37FGL
AK-40RFL
AK-37UBFL

05

SMOOTH BARREL SHOTGUN

AK-12UBS

06

ACCESSORIES AND SPARE PARTS

AK-SIGHT
BIPOD
AND OTHERS

AKDAŞ SİLAH CORP.

THE LEADING MARK OF TURKEY

Ömer Akdaş from Huğlu is the founder of AKDAŞ Arms who started working in gun-making business in 1948 with a few of the best Turkish gunsmiths of the time. After a while, he designed his first single barrel shotgun and in the following years began to run his own gun workshop. Thereafter, he became well-known for his skills and was the gun-maker beloved by many hunters. Ömer Akdaş was the one ever to manufacture the very first side-by-side shotgun in Turkey.

In 1987, when Selim AKDAŞ joined, the Company has started mass and modern production technologies. By this potential they started to produce defence products and textile and automotive spare parts.

In 2016 the company got a Certificate of Security so that they became a direct supplier of Defence Industry.

For 30 years AKDAŞ Silah has been producing defence spare parts. The Company is one of the main supplier of MKE as producing the Lower and Upper receivers of Turkish Infantry Rifle MPT-76 and MPT-55 and also MP5 semi automatic pistols. The Company also produces the spare parts of sub-machine guns.

In addition to these the Company has designed and produced a 40mm Underbarrel Grenade Launcher which is suitable with Turkish Infantry Rifles MPT-55 and MPT-76. By This way the Company has become the first and single Company in Turkey who supplies its own military in Konya.

The Company also produced the new versions of the Grenade Launchers. In addition to This they produced an original design Drummed Grenade launcher, 9x19 sub-machine gun, 5x56 sub-machine gun, rifled shotguns. The Company has so many patents and registrations of their own designs.

AKDAŞ SİLAH CORP.



Selim AKDAŞ

We master the work, we apprentice, with a maxim befitting professionals...

We are proud of being Akdaş Silah which is one of the rare companies that started from the zero point of the technology and reached a high-tech level that supplies defense products to Turkish Military forces directly.

As a company that exports its own products to more than 30 countries Akdaş Silah is going on its way that cares about the processes of R&D, production, quality control and so.

By aiming to get our region and country to contemporary civilization level, we will produce and serve continually.

S Akdaş



*We master the work,
we apprentice, with a maxim
befitting professionals.*



OUR PRODUCTS

PISTOLS

SEMI AUTOMATIC



SA-9



SEM-55

SUB-MACHINE



SSA-9



SEMX-55

GRENADE LAUNCHERS



AK-40GLJ



AK-40GLX



AK-40MGL

ANTI RIOT LAUNCHERS



AK-40RGL



AK-37RGL



AK-37FGL



AK-40RFL



AK-37UBFL

SMOOTH BARREL SHOTGUN



AK-12UBS

ACCESSORIES AND SPARE PARTS



AK-SIGHT



BIPOD





PISTOLS >

PISTOLS

SEMI AUTOMATIC

SA-9



Semi Auto Pistol for Civilian Market

TECNICAL SPECIFICATIONS



Caliber	9x19 mm
Barrel Material	AISI-SAE 4140 (42CrMo4)
Barrel Finish	Chrome Plated
Receivers Material	7075 T6 Aluminium Alloy
Muzzle	1/2-28 TPI , 3 lugged for flash hiders & suppressors
Flash Hiders	1.80" (46 mm)
Magazine Capacity Options	10, 20, 30
Barrel Length	6.5" (165mm) - 8" (203mm) 10" (254mm) - 12" (305mm)
Total Length	min. 14.70" 374 mm
Weight	min. 2200 gr (4,85 lb) (Without Magazine)
Operation	Blowback Close Bolt
Mode of Operation	Semi- Automatic
Fire Selector Position	Ambidextrous
Trigger Pull Force	5.5 - 10 lb
Safety	Hammer Block
Sight	Mechanic Sight
Height	yak. 8.58" (218 mm)
Width	yak. 2.26" (57.5 mm)
Range	100 m - 330 ft (Effective)
Shot Pattern	6 MOA (25 mm)
Muzzle Velocity	400 m/s (1330 ft/s)
Barrel Profile	Saami Z299 3 Standard Luger 9 mm, Luger Plus 1:10" 6 grooves right hand twist.



PISTOLS

SEMI AUTOMATIC

SEM-55



*Semi-Auto Pistol that can be used
without stock tanks to upside
located recoil spring*

TECNICAL SPECIFICATIONS



Caliber	5.56 mm
Barrel Material	32CrMoV12-10
Barrel Finish	Chrome Plated
Receivers Material	7075 T6 Aluminium Alloy
Muzzle	1/2-28 UNEF, suppressors
Flash Hiders	1.80" (46 mm)
Magazine Capacity Options	10-20-30 Rnd
Barrel Length	7.5" (191 mm) - 8" (203 mm) 10" (254 mm) - 12" (305 mm)
Total Length without Stock	Min. 16.2" 411 mm
Total Length with Std. Telescopic Stock Shortest / Longest	Min. 24.3" (615 mm) Min. 28.4" (720 mm)
Total Length with Bar Type Telescopic Stock Shortest / Longest	Min. 21.2" 538 mm Min. 25" 635 mm
Weight	min. 2350 gr (5.18 lb) (Without Magazine)
Operation	Short stroke, gas piston action, rotating head locking bolt
Mode of Operation	Semi- Automatic
Fire Selector Position	Ambidextrous
Trigger Pull Force	5.5 - 10 lb
Safety	Hammer Block
Sight	Mechanic Sight
Height	approx. 10.2" (259 mm)
Width	approx 2.5" (63.5 mm)
Range	min 150 m-490 ft (Effective)
Shot Pattern	4 MOA
Muzzle Velocity	700 m/s (1330 ft/s)
Barrel Profile	1:7" 6 grooves right hand twist.

PISTOLS

SUB-MACHINE

SSA-9



***New generation,
light and ergonomic 9x19 mm
sub-machine gun for military market***

TECNICAL SPECIFICATIONS



Caliber	9x19 mm
Barrel Material	AISI-SAE 4140 (42CrMo4)
Barrel Finish	Chrome Plated
Receivers Material	7075 T6 Aluminium Alloy
Muzzle	1/2-28 TPI , 3 lugged for flash hiders & suppressors
Flash Hiders	1.80" (46 mm)
Magazine Capacity Options	10, 20, 30
Barrel Length	6.5" (165mm) - 8" (203mm) 10" (254mm) - 12" (305mm)
Total Length	min. 14.70" 374 mm max. 25.3" 643 mm
Weight	min. 2200 gr (4,85 lb) (Without Magazine)
Operation	Blowback Close Bolt
Mode of Operation	Fully & Semi- Automatic
Fire Selector Position	Ambidextrous
Trigger Pull Force	5.5 - 10 lb
Safety	Hammer Block
Sight	Mechanic Sight
Height	yak. 8.58" (218 mm)
Width	yak. 2.26" (57.5 mm)
Range	100 m - 330 ft (Effective)
Shot Pattern	6 MOA (25 mm)
Muzzle Velocity	400 m/s (1330 ft/s)
Barrel Profile	Saami Z299 3 Standard Luger 9 mm, Luger Plus 1:10" 6 grooves right hand twist.



PISTOLS

SEMI AUTOMATIC

SEM X-55



**5x56 mm sub-machine gun for
military market that can be used
without stock tanks to its
ergonomic structure**

TECNICAL SPECIFICATIONS



Caliber	5.56 mm
Barrel Material	32CrMoV12-10
Barrel Finish	Chrome Plated
Receivers Material	7075 T6 Aluminium Alloy
Muzzle	1/2-28 UNEF, suppressors
Flash Hiders	1.80" (46 mm)
Magazine Capacity Options	10-20-30 Rnd
Barrel Length	7.5" (191 mm) - 8" (203 mm) 10" (254 mm) - 12" (305 mm)
Total Length without Stock	Min. 16.2" 411 mm
Total Length with Std. Telescopic Stock Shortest / Longest	Min. 24.3" (615 mm) Min. 28.4" (720 mm)
Total Length with Bar Type Telescopic Stock Shortest / Longest	Min. 21.2" 538 mm Min. 25" 635 mm
Weight	min. 2350 gr (5.18 lb) (Without Magazine)
Operation	Short stroke, gas piston action, rotating head locking bolt
Mode of Operation	Semi & Fully Automatic SMG
Fire Selector Position	Ambidextrous
Trigger Pull Force	5.5 - 10 lb
Safety	Hammer Block
Sight	Mechanic Sight
Height	approx. 10.2" (259 mm)
Width	approx 2.5" (63.5 mm)
Range	min 150 m-490 ft (Effective)
Shot Pattern	4 MOA
Muzzle Velocity	700 m/s (1330 ft/s)
Barrel Profile	6 grooves right hand twist





GRENADE LAUNCHERS >

GRENADE LAUNCHERS

AK-40GLX



TECNICAL SPECIFICATIONS



Caliber	40 mm
Barrel Length	254 mm (10")
Total length standalone (telescopic stock open)	685 mm (27")
Total length standalone (telescopic stock closed)	610 mm (24")
Total length attached to mpt-76 rifle	337 mm (13.25")
Weight (standalone-empty)	2510 gr
Weight (attached to mpt-76 rifle-empty)	1470 gr
Sight system	100-400 m (100 m intervals)
Shooting mode	Single shot (both side loading & positioning wedge)
Trigger	Double Action
Shooting velocity	5-6 rounds / minute
Muzzle velocity	Minimum 76 m/s (±5m/s)
Effective range	max 400 m
Trigger Pull FORCE	25 - 35 Newton
Coking force	150 - 200 Newton
Barrel life span	5000 rounds
Shooting pattern	Into 10 m diameter at 200 m
TYPE OF AMMUNITION	40x46 mm new and old generation low velocity (LV) ammunition of any type

40 mm grenade launcher that can be assembled to weapons which have picatinny rails

GRENADE LAUNCHERS

AK-40GLJ



TECNICAL SPECIFICATIONS



Caliber	40 mm
Barrel Length	191mm (7.5")
Total length standalone (telescopic stock open)	623 mm (24.5")
Total length standalone (telescopic stock closed)	547 mm (21.5")
Total length attached to mpt-76 rifle	272 mm (10.75")
Weight (standalone-empty)	2290 gr
Weight (attached to mpt-76 rifle-empty)	1500 gr/max
Sight system	100-400 m (100 m intervals)
Shooting mode	Single shot (both side loading & positioning wedge)
Trigger	Double Action
Shooting velocity	5-6 rounds / minute
Muzzle velocity	Minimum 76 m/s (± 5 m/s)
Effective range	400 m
Trigger Pull FORCE	40 - 50 Newton
Cocking force	60 - 95 Newton
Barrel life span	5000 rounds
Shooting pattern	Into 10 m diameter at 200 m
TYPE OF AMMUNITION	40x46 mm new and old generation low velocity (LV) ammunition of any type



World's lighter grenade launcher which is suitable for light and left handed users. It has highest range in the world

GRENADE LAUNCHERS

AK-40MGL



TECNICAL SPECIFICATIONS



Barrel Length	203 mm (8")
Drum Length	141 mm (5.5")
Operation	Gas Operated System
Sight System	Mechanics and Digital
Height	210 mm (8.2")
Width	156 mm (6")
Effective Range	800 m with medium velocity MV ammunition and 400 m with low velocity LV ammunition
Caliber	40 mm
Barrel Material	4140 Crack-Controlled Alloy Steel
Receiver Material	7075 Alloy Aluminium
Stock System	5-stage telescopic stock that can be positioned in 2 different positions (-10, +25 degrees)
Shooting Pattern	Into 10m diameter at 200m
Muzzle Velocity	76 m/s with LV ammunition and 100 m/s with MV ammunition
Trigger System	Double-action Trigger

Multiple grenade launcher that can be used with middle and low speed ammunition. Has a range of 400-800 m.





ANTI RIOT LAUNCHERS >

ANTI RIOT LAUNCHERS

AK-40RGL



TECNICAL SPECIFICATIONS



40mm anti riot launcher made of high quality aluminum material, suitable for use without a stock

Caliber	37/38 mm - 40 mm
Barrel Length	305 mm (12")
Barrel Type	Smooth Barrel
Total Length (Telescopic Stock Open)	740 mm
Total Length (Telescopic Stock Closed)	680 mm
Total Length Without Stock	445 mm
Weight (Unloaded)	2325 gr -1900 gr
Action	Single Break Action
Trigger System	Double-Action trigger
Safety	Ambidextrous Slide Safety
Sight System	Low Position and 80/100/130 Meter Intervals
Shooting Mode	Single shot
Effective Range	100 m
Trigger Pull Force	45 Newton
Stock	Detachable telescopic
Shooting Velocity	5-6 rounds / minute
Barrel And Receiver Material	Barrel 4140 Steel, Receiver 7075 Aluminum
Type Of Ammunition	40 mm or 37/38 mm Gas Cartridges
Sling	NATO QD Tactical

ANTI RIOT LAUNCHERS

AK-37RGL



TECNICAL SPECIFICATIONS




37mm anti riot launcher made of high quality aluminum material, suitable for use without a stock

Caliber	37/38 mm - 40 mm
Barrel Length	305 mm (12")
Barrel Type	Smooth Barrel
Total Length (Telescopic Stock Open)	740 mm
Total Length (Telescopic Stock Closed)	680 mm
Total Length Without Stock	445 mm
Weight (Unloaded)	2325 gr -1900 gr
Action	Single Break Action
Trigger System	Double-Action trigger
Safety	Ambidextrous Slide Safety
Sight System	Low Position and 80/100/130 Meter Intervals
Shooting Mode	Single shot
Effective Range	100 m
Trigger Pull Force	45 Newton
Stock	Detachable telescopic
Shooting Velocity	5-6 rounds / minute
Barrel And Receiver Material	Barrel 4140 Steel, Receiver 7075 Aluminum
Type Of Ammunition	40 mm or 37/38 mm Gas Cartridges
Sling	NATO QD Tactical

ANTI RIOT LAUNCHERS

AK-37FGL

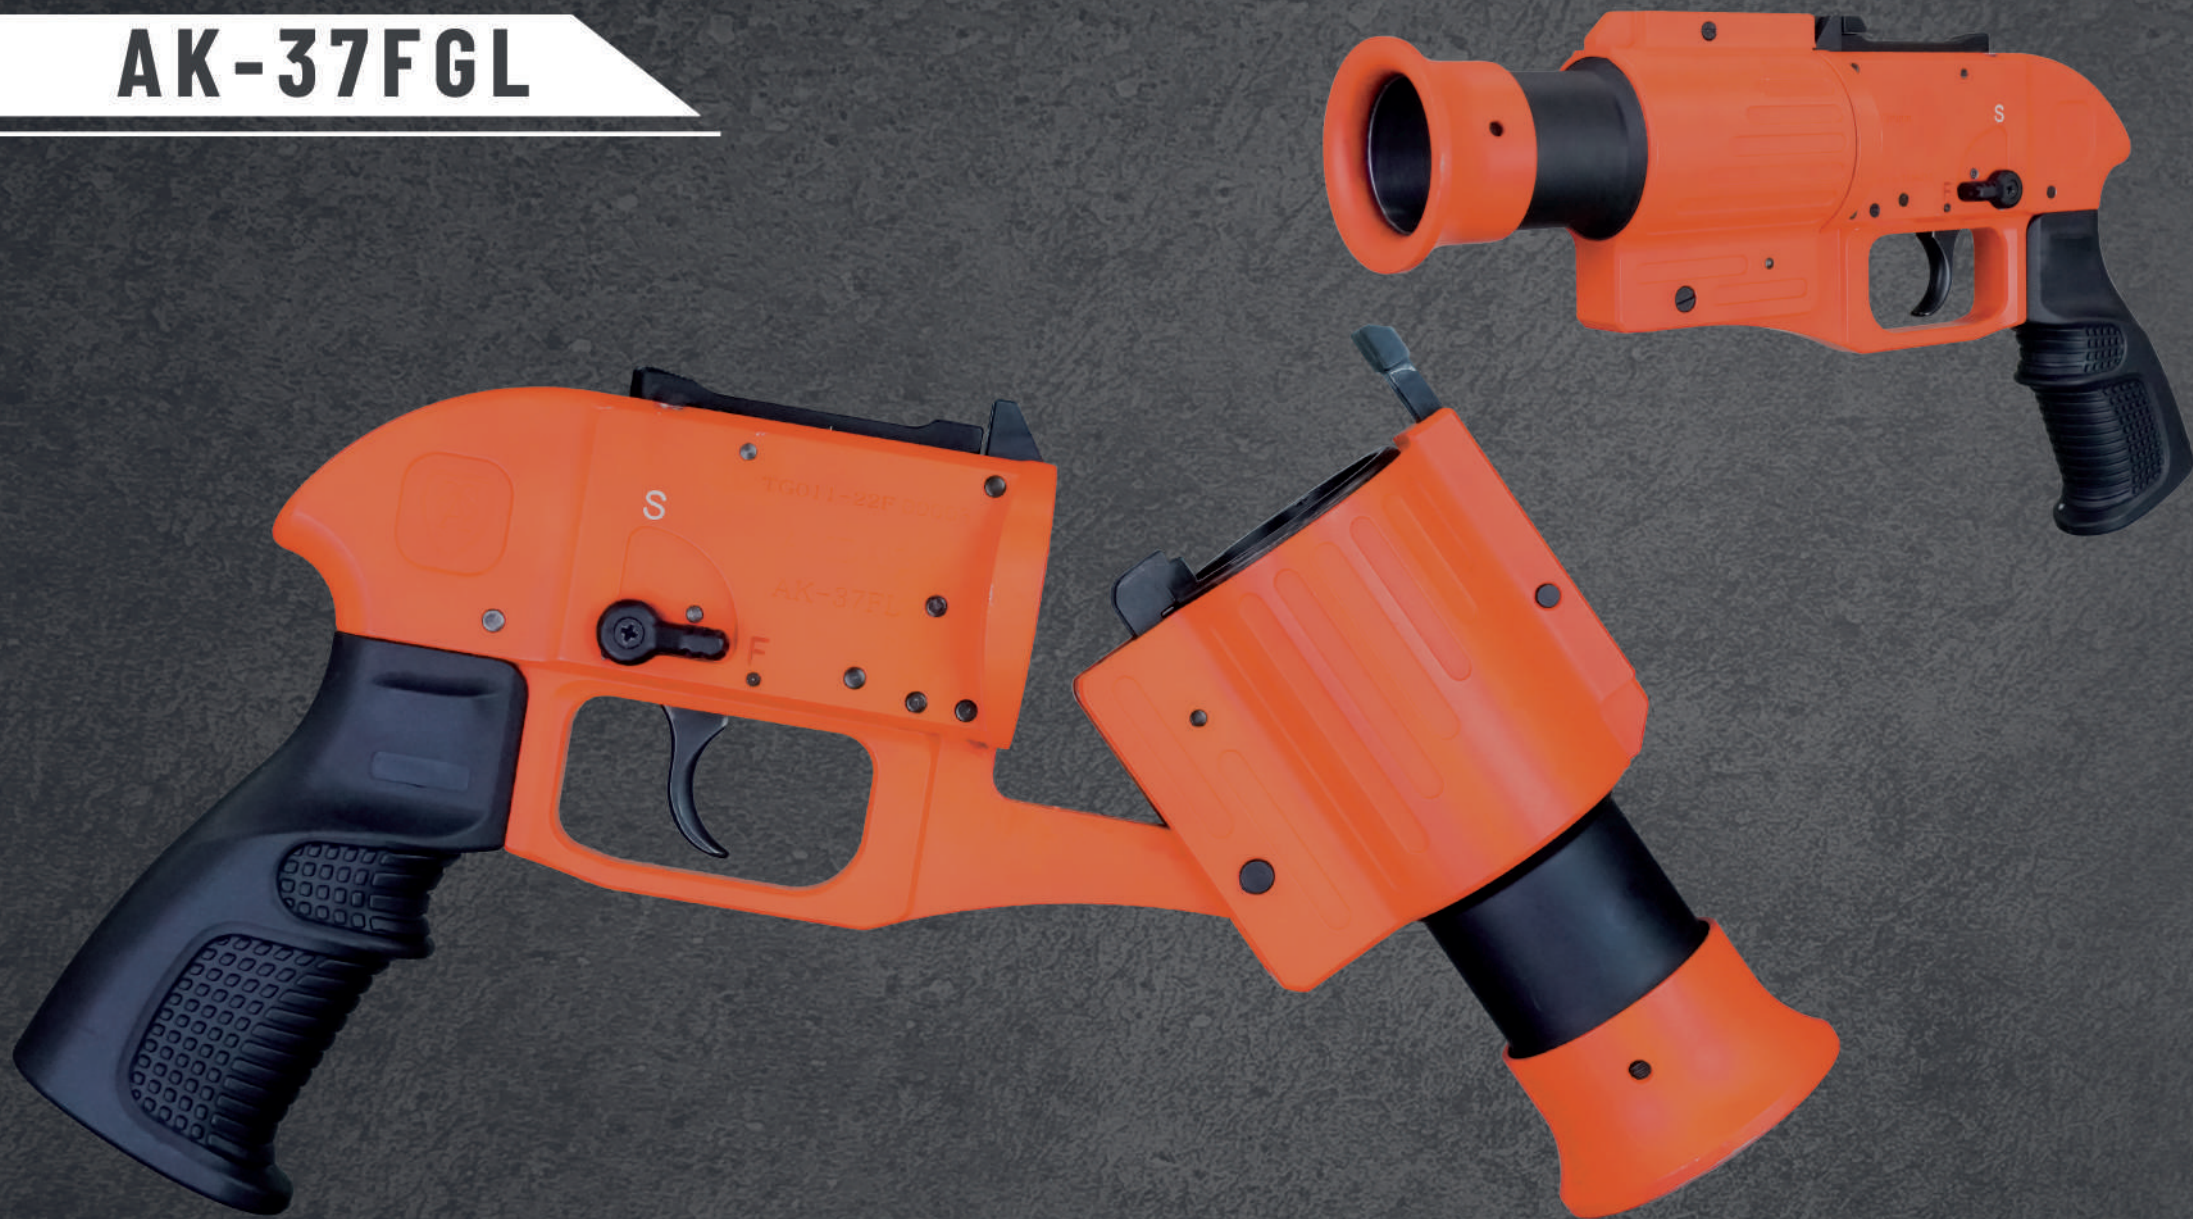

TECNICAL SPECIFICATIONS



37mm FLAYER launcher made of high quality aluminum material, has original design.

Caliber	37/38 mm
Barrel Length	5" (127mm), 5.5" (140mm) 6" (152.5mm)
Barrel Type	Smooth Barrel
Total Length	min. 305 mm (12")
Total Height	167.5 mm (6.6")
Width Max.	58 mm (2.3")
Weight (Unloaded)	1000 gr
Action	Single Break Action
Trigger System	Double-action Trigger
Safety	Ambidextrous Slide Safety
Shooting Mode	Single shot
Effective Range	max. 100 m
Trigger Pull Force	45 Newton
Stock	None only Pistol Grip
Shooting Velocity	5-6 rounds / minute
Barrel And Receiver Material	Barrel 4140 Steel, Receiver 7075 Aluminum
Type Of Ammunition	37/38 mm Gas Cartridges
Sling	NATO QD Tactical

ANTI RIOT LAUNCHERS

AK-40RFL



TECNICAL SPECIFICATIONS



40 mm rifled anti riot launcher made of high quality aluminum material, suitable for use without stock

Caliber	37/38 mm - 40 mm
Barrel Length	305 mm (12")
Barrel Type	Smooth Barrel
Total Length (Telescopic Stock Open)	740 mm
Total Length (Telescopic Stock Closed)	680 mm
Total Length Without Stock	445 mm
Weight (Unloaded)	2325 gr -1900 gr
Action	Single Break Action
Trigger System	Double-Action trigger
Safety	Ambidextrous Slide Safety
Sight System	Low Position and 80/100/130 Meter Intervals
Shooting Mode	Single shot
Effective Range	100 m
Trigger Pull Force	45 Newton
Stock	Detachable telescopic
Shooting Velocity	5-6 rounds / minute
Barrel And Receiver Material	Barrel 4140 Steel, Receiver 7075 Aluminum
Type Of Ammunition	40 mm or 37/38 mm Gas Cartridges
Sling	NATO QD Tactical

ANTI RIOT LAUNCHERS

AK-37UBFL



TECNICAL SPECIFICATIONS



Caliber	7/38 mm - 40 mm
Barrel Length	7.5" (190 mm) or 10" (254 mm)
Total length stand-alone (telescopic stock open)	24.5" (622 mm) or 27" (685 mm)
Total length stand-alone (telescopic stock closed)	21.5" (546 mm) or 24" (610 mm)
Total length without stock	275 mm (10.8") or 390 mm (13")
Weight (stand-alone-empty)	max. 2510 gr
Weight (attached to rifle-empty)	max. 1500 gr
Sight system	50-150 m (25 m Intervals)
Shooting mode	Single Shot
Shooting velocity	5-6 rounds / minute
Effective range	50-150 meter
Trigger pull FORCE	25-35 Newton
Coking force	150-200 Newton
Barrel life span	5000 mermi
Shooting pattern	Into 10m diameter at 130m
TYPE OF AMMUNITION	37/38 mm Flare & Gas Cartridges



Under barrel 37 mm anti riot launcher suitable for right and left handed users





SMOOTH BARREL SHOTGUN >

SMOOTH BARREL SHOTGUN

AK-12UBS



TECNICAL SPECIFICATIONS



*12 caliber shotgun that can be assembled to
weapons with a picatinny rail system*

Operation	Pump Action
Caliber	12 GA
Chamber	70mm
Magazine Capacity	3+1
Barrel Length	22 cm (8.7")
Total Length (Stand-Alone Form - Telescopic Stock Open)	760 mm (30")
Total Length (Stand-Alone Form - Telescopic Stock Closed)	684 mm (27")
Total Length (Attached To An Infantry Rifle)	409mm (16")
Height	228 mm (9")
Total Weight (Stand-Alone Form - Empty)	3056 gram (6.73 lbs.)
Total Weight (Attached To An Infantry Rifle - Empty)	2068 gram (4.55 lbs)
Trigger Pull Force	30 Newton
Type Of Ammunition	12 ga ga lethal (SG, BB, Slugs etc.) or non-lethal (rubber, plastic)





ACCESSORIES AND SPARE PARTS >

ACCESSORIES AND SPARE PARTS

AK-SIGHT



TECNICAL SPECIFICATIONS

- ❑ 0,96" Oled Screen
- ❑ ARM Cortex-M4 Micro Processor
- ❑ 6 axis Gyro
- ❑ 1/2AA Lisoc12 Battery
- ❑ 3,7 Volt Operating Voltage
- ❑ IP68 Degree of Protection
- ❑ 285 gr (including connetcion apparatus and battery)
- ❑ Anodized finish body
- ❑ Control Modes (On-Off, Ammo Select, Adjust Screen Brightness)
- ❑ Feedbacks (Battery Indicator, Ammo Indicator, Barrel Turn, Direction) Correction Notice



- ❑ With its automatic calibration feature, the warning system, which shows the muzzle tilt that may cause the ammunition to go off target, provides a high hit rate with each shot.
- ❑ It provides the opportunity to shoot fast and accurately at multiple targets at different distances without having to deal with mechanical sight settings.
- ❑ Ability to operate in harsh climate and weather conditions

ACCESSORIES AND SPARE PARTS

PARTS



RECEIVER



MP5 TRIGGER




E RASSEMBLY



BIPOD

ACCESSORIES AND SPARE PARTS

PARTS

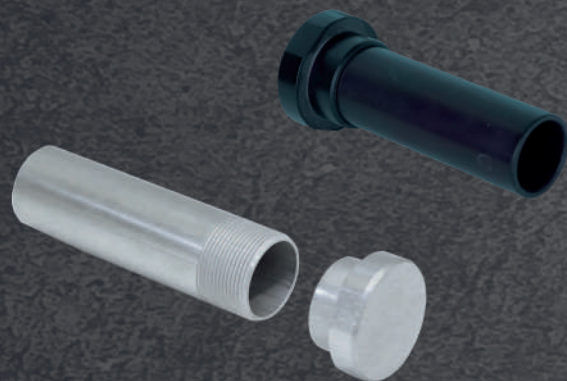

**BUFFER TUBE
AND BUFFER NUT**



**FIRECRACKER
NAIL**



**CHA
HAM**





1948

f /akdasarms
in /akdassilah



Phone : +90 (332) 516 14 29 (pbx) / 444 64 46
Fax : +90 (332) 516 14 34
Whatsapp : +90 (537) 357 68 40
Address : Huğlu Mah. Huğlu Cad. No: 95/A - BEYŞEHİR / KONYA
Mail : info@akdassilah.com - export@akdassilah.com

► akdassilah.com